

DispenserONE® FLEXI 17"

seko

DispenserONE FLEXI 17" is a 10 Liter capacity dispenser of sanitizing chemicals, designed to be installed in small to medium-sized sites such as supermarkets, franchises and public offices. Furthermore, it allows the customers to unlock additional revenues by selling advertising space or displaying promotions.

Product Features

- Maximum tank capacity of 10 Litres allows more than 10.000 doses of sanitizing gel in average, minimizing the servicing due to tanks refilling/replacement, especially in places with high influx of people. The unit comes with a tank of 10 liters included in the package.
- Touch free dispensing through proximity sensor guarantees maximum hygiene and safety.
- Peristaltic dosing with single shot time adjustment ensures flexibility of the dispensing depending on the type of sanitizer to be dosed..
- Robust design with metal enclosure, yet contained footprint of the unit, makes it suitable to every kind of facility.
- Integrated level with audible alarm control gives direct warnings to the owner avoiding lack of disinfectant in the device.
- Mains power supply avoids waste of batteries and frequent maintenance due to batteries replacement.
- The unit is provided with wheels to allow easy transportation and placement; the metal basement is provided with holes for optional ground fixation.
- Wide frontal flat surface ensures easy bespoke branding with custom logo and colour.
- Key door lock secures chemical canister preventing from thefts or tampering.
- Wide 17" display allows the customers to unlock additional revenues by selling advertising space or displaying promotions by loading custom videos via integrated USB port.




Your Choice,
Our Commitment

Technical data can be changed without notice.
TD_DispenserONE FLEXI 17" _rev 1.

DispenserONE® FLEXI 17"

seko

Technical Features	
CERTIFICATIONS	CE, EAC
MAXIMUM TANK CAPACITY	10 liters (included)
MINIMUM CANISTER OPENING	32 mm
DISPENSING RATE	Adjustable dosing time from 0,2 to 2 seconds
POWER SUPPLY	100÷240 Vac @50/60 Hz
ELECTRICAL CLASS	Class I (ground connected)
ACTIVATION	Touch free via proximity sensor
MAX CONSUMPTION	20 W
OPERATING TEMPERATURE	10-50°C
STORAGE TEMPERATURE	-20÷60°C
CASE MATERIAL	Zinc plated Iron
MAX UNITS PER PALLET	6
WEIGHT	30 Kg

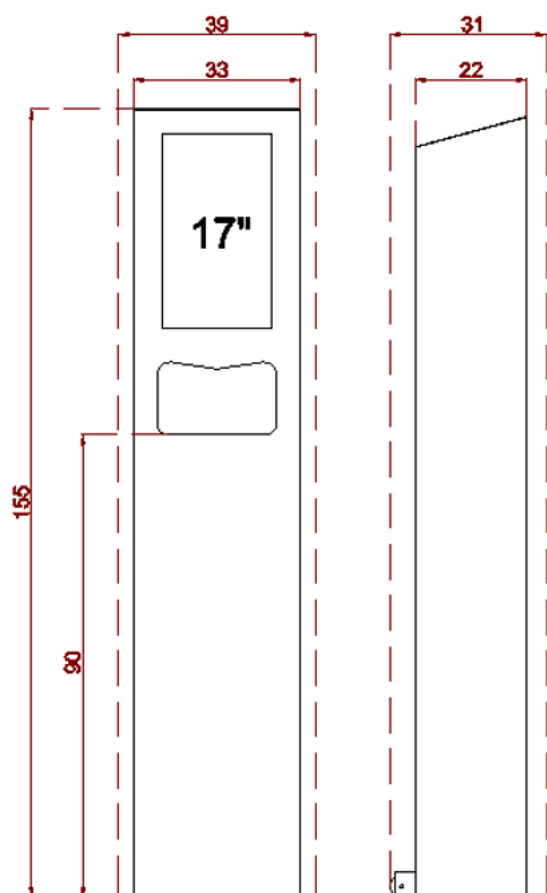

Your Choice,
Our Commitment

Technical data can be changed without notice.
TD_DispenserONE FLEXI 17" _rev 1.